




ADJUSTMENT RANGE

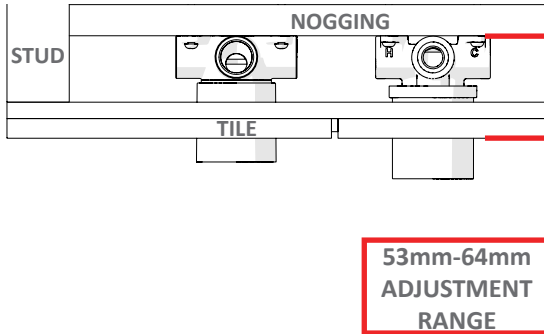

EXPLODED VIEW

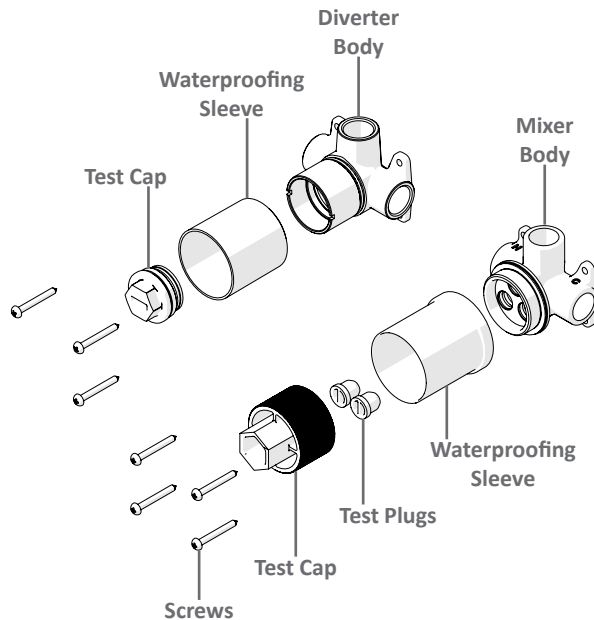


CONNECTIONS

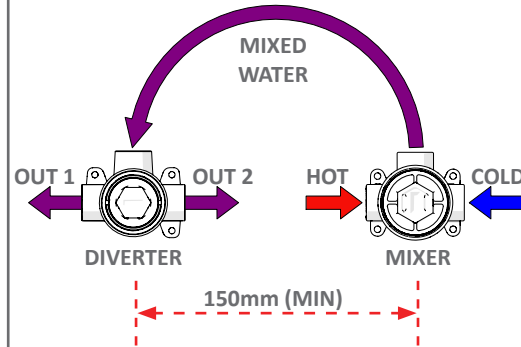


Plumb all connections between the Diverter & Mixer bodies.
Ensure there is a **minimum** of 150mm between both breaches.

1

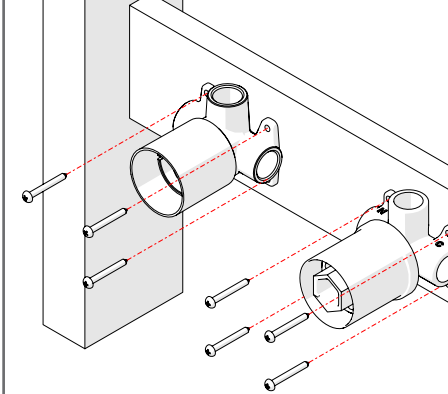

Screw both Breaches onto Nogging to dimensions shown in adjustment range.

2

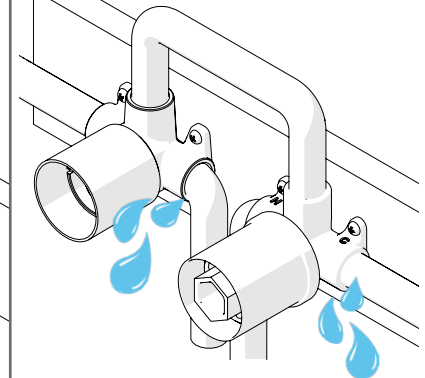


Ensure wall outlet fitting is capped and that Test Plugs and Test Caps have NOT been removed. Perform **PRESSURE TEST** and check for leaks.


PRESSURE TESTING

*Ensure Test Caps are installed correctly before performing pressure test.

⚠ FOR STANDARD PRESSURE TESTING ⚠
Up To 500Kpa

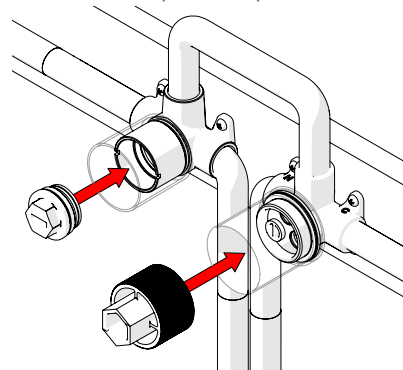

⚠ FOR HIGH PRESSURE TESTING ⚠
500-1500Kpa

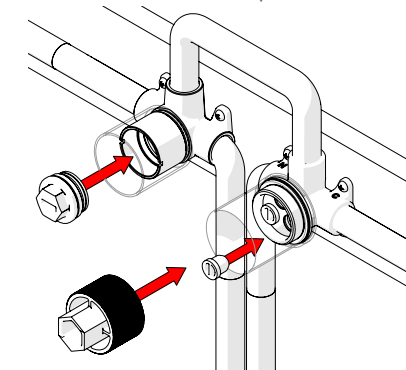

For high pressure testing of pipes, remove Test Cap and add another Test Plug into the Cold Inlet.
Re-attach Test Cap. **Hand Tighten + 120° OR 10 N m.**
Perform high pressure test for 30 minutes. As per AS3500.1



recommended
working pressure
150-500KPa
maximum hot
water temperature
75 degrees

NOTE:

- If the pressure exceeds or is likely to exceed 550kpa, an approved pressure limiting device must be installed.
- Flush out all pipe work prior to installation.
- If the water temperature exceeds 75°C, an approved tempering valve must be fitted.
- Installation should comply with Australian standard AS3500.1 or relevant local authority requirements. Showers may not be suitable for use within:
 - Gravity-fed water systems
 - Some instantaneous hot water systems; or

• Pressure supply less than 150kPa;
NOTE: The 500kPa maximum water supply pressure does not apply to fire service outlets.

For tapware, any flow controller incorporated in the outlet to be tightened to prevent removal by hand. As Per AS3718

Failure to comply with the above may void all warranties.

WARRANTY:

Please refer to the full warranty statement enclosed with the product before installing.

MAINTENANCE AND CARE:

- Chrome plated surfaces should be cleaned with mild liquid detergent or soap and water.
- Do not use cream cleaners or citrus based cleaning products, as they are abrasive.
- Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.

DISCLAIMER:


While we aim to ensure the specifications shown are correct at the time of printing, we reserve the right to make modifications without prior notice. Always use the physical product measurements for mark-ups and roughing-in as the line drawing shown may differ from the actual product over time.

*All measurements are shown in millimeters.

3

Drill a 50mm Hole for the Diverter and a 50mm hole for the Mixer in the cement sheet.


Apply waterproofing membrane up to Waterproofing Sleeves. Tile wall where necessary.

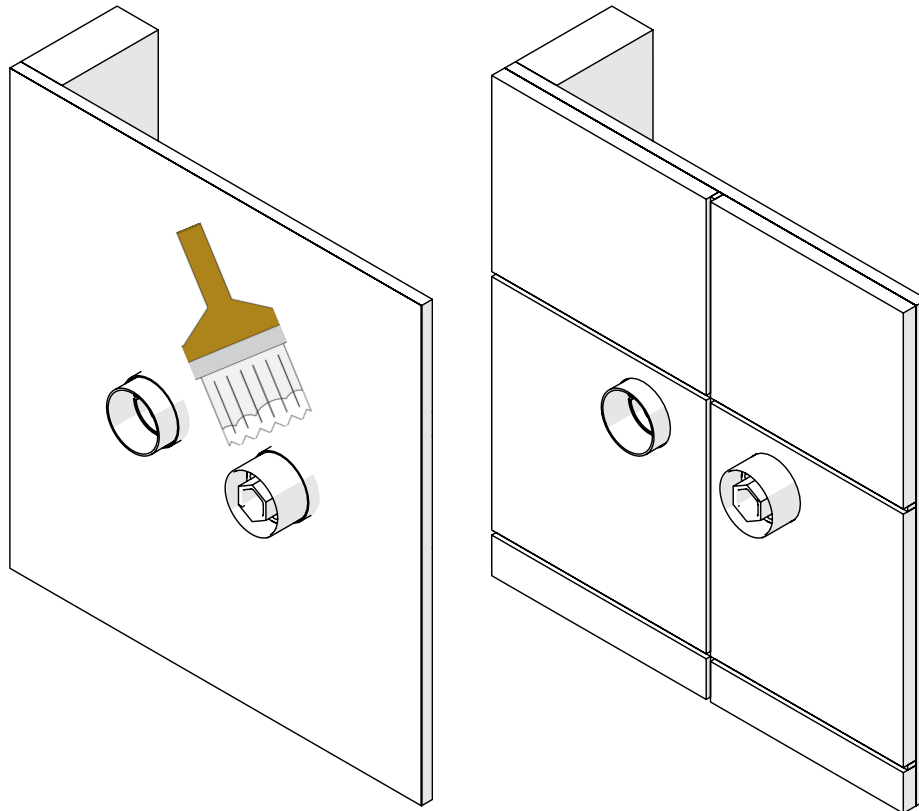

4

After Tiling, use a Knife to Trim Waterproofing Sleeves flush to Tile face.

Switchmix ready for fit off (Order Trim Kit separately).

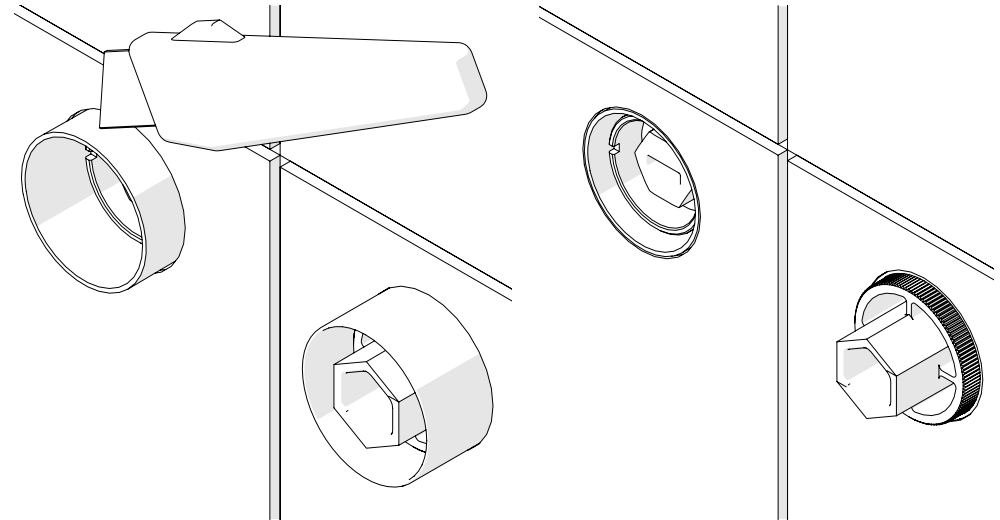

recommended
working pressure
**150-
500KPa**
maximum hot
water temperature
**75
degrees**



NOTE:

- If the pressure exceeds or is likely to exceed 550kpa, an approved pressure limiting device must be installed.
- Flush out all pipe work prior to installation.
- If the water temperature exceeds 75°C, an approved tempering valve must be fitted.
- Installation should comply with Australian standard AS3500.1 or relevant local authority requirements. Showers may not be suitable for use within:
 - Gravity-fed water systems
 - Some instantaneous hot water systems; or

- Pressure supply less than 150kPa; NOTE: The 500kPa maximum water supply pressure does not apply to fire service outlets.

For tapware, any flow controller incorporated in the outlet to be tightened to prevent removal by hand. As Per AS3718

Failure to comply with the above may void all warranties.

WARRANTY:

Please refer to the full warranty statement enclosed with the product before installing.

MAINTENANCE AND CARE:

- Chrome plated surfaces should be cleaned with mild liquid detergent or soap and water.
- Do not use cream cleaners or citrus based cleaning products, as they are abrasive.
- Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.

DISCLAIMER:

While we aim to ensure the specifications shown are correct at the time of printing, we reserve the right to make modifications without prior notice. Always use the physical product measurements for mark-ups and roughing-in as the line drawing shown may differ from the actual product over time.

*All measurements are shown in millimeters.